

Operational Standards

OS - 1.14 | Lifting Equipment Storage


Revision:

A

Section:

1.0 - Site Setup & Housekeeping

Visual Aids

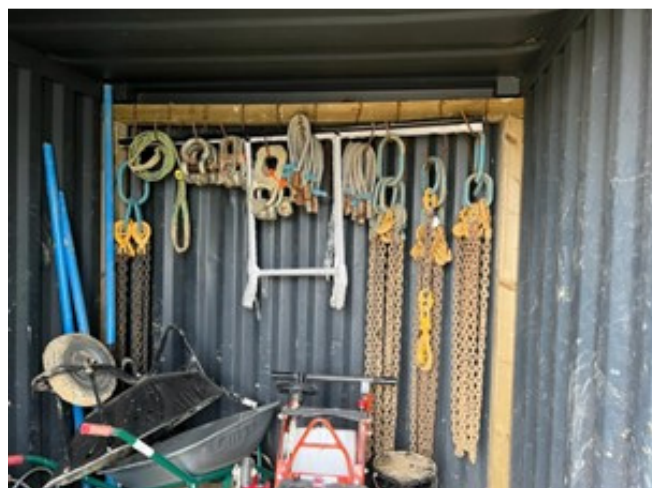

Information

Objective	Application
• To store lifting equipment in a safe and secure manner • To protect lifting equipment from damage	• Sites where MIDA are acting as Principal Contractor and Subcontractor
Site Setup Instructions	Operational Responsibilities
• Storage – timber is to be secured to the container, in order to fabricate a bespoke storage rack of suitable construction, to securely hold the weight of anticipated lifting accessories stored locally	• All lifting accessories such as chains, shackles, etc. are to be stored on fabricated storage racks within the site container • All lifting accessories to be subjected to a pre-use visual inspection by the Slinger-Banksman/Plant Operative • All lifting accessories to form part of the weekly LOLER inspection register, completed by the Site Manager • Statutory LOLER certification to be available onsite