

Operational Standards

OS - 1.3 | Compound - Sub




Revision:

B

Section:

1.0 - Site Setup & Housekeeping

Visual Aids

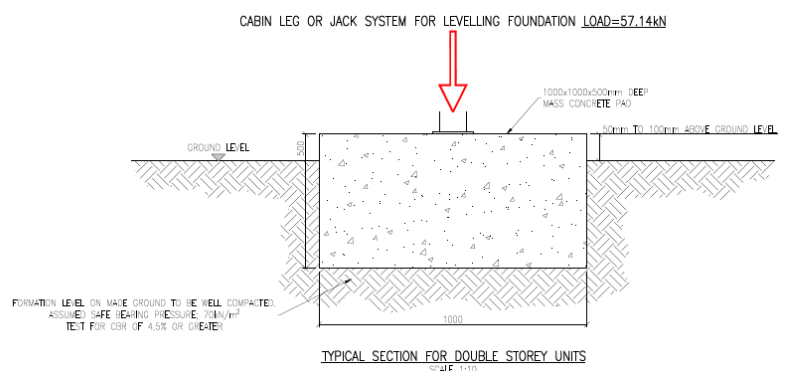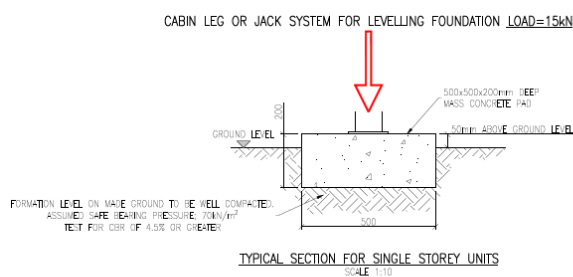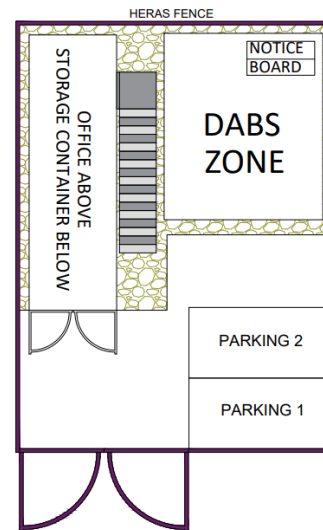

Information

Objective	Application
● To install adequate welfare facilities for all persons working or visiting site ● Well organised site office environment ● Provide clear communication to site personnel and visitors ● Positively promote MIDA brand	● Sites where MIDA are acting as Subcontractor
Site Setup Instructions	Operational Responsibilities
● Compound Surface – area to be stripped, levelled, constructed and compacted with 6F2 and plainings Containers; ○ Option 1 – MIDA Site office to be placed on the ground ○ Option 2 – MIDA Storage container to be placed on firm level ground. MIDA Site office to be placed on top of the Storage container ● Compound Pads – require a safe bearing strata of 70Kpa with a CBR taken to achieve 4.5% or greater, the concrete for the levelling pads is to be C20/25 mass concrete at 500x500 at 200mm depth for single storey cabins and 1000x1000 at 500mm depth for double storey cabins ● Power – where mains power is unavailable, solartainers are to be utilised to provide the primary power source ● Briefing Area – A briefing area is to be created by attaching the Daily Risk & Hazard board to the MIDA container ● Internal Signage – H&S information board, Traffic Management board, Training Matrix board, Plant board, Programme board ● First Aid Point – to be installed including, signage, first aid kit and eye wash station	● Welfare is to be provided by the PC and provisions monitored by the MIDA Site Manager to ensure this is adequate ● Office & Storage container to be monitored weekly by the Site Manager for cleanliness ● Compound set-up to form part of the temporary works register ● Signage to be inspected monthly and updated as required