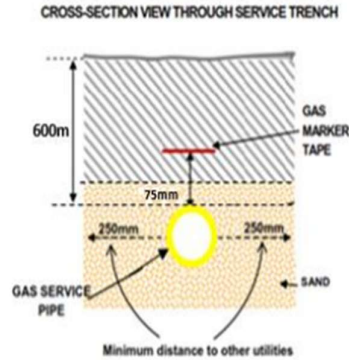


Business:	MIDA Civil Engineering Ltd		ALERT
Title:	Plot Service Installation Separation	Reference No:	QA35
Issued By:	Sam James	Issue Date:	6 th Feb 2025
Type of Alert:	Quality & Compliance		
Subject:	Plot Service Installation Guidance		
Operatives Affected:	Groundworkers		
Details:	When installing plot services there are set regulation spacings to separate the Gas from all other services and these need to be followed to avoid connection issues and noncompliance as well as a potential safety issue, the gas service has to be 250mm from all other services and with Backfill material being sand, dust or pea shingle and free from anything sharp or heavy. Marker tape MUST be applied over the line of the service and/or duct. The pipe / duct ends MUST be sealed and protected Other services should similarly follow the same procedure to be separated backfilled with correct material and have marker tape above to the providers requirements  Incorrect  example		
Action Required:	Ensure all services are Installed correctly following service providers guidelines		
Further Information:			
Method for Communication:	Briefing by Site Manager to groundworkers via TBT Alert		